

Juniper wall panel installation guide

This guide explains how to install the
Juniper Decorative Panel inside a barrel sauna.
Please read through the entire guide before starting installation.



Required tools & materials

- Drill / screwdriver
- 4 × 40 A2 stainless steel screws, not included
- Measuring tape
- Level
- Pencil



Step 1 – Prepare the Sauna Interior

- Remove the floor grids.
- Remove both backrests from the sauna wall.
- Ensure the wall surface is clean and free from dust.



fig. 1

Important notes

- Installation is carried out from inside the sauna.
- Always leave a small expansion gap between the panel and wall cladding.
- Juniper panels are decorative elements made from natural wood slices; visual variation is normal.
- Panel thickness: approx. 30 mm (1.18 inch).



Step 2 – Position the Panel

- Place one half of the Juniper panel against the wall. (see Fig.1 and 2)
- Leave a small gap between the panel and the surrounding wall boards. (see Fig.3)
- Fit the second half of the panel into position. (see Fig.4)
- Align both halves carefully so the joint is centered and visually balanced.(see Fig.5)



fig. 2



fig. 3



fig. 4



Step 3 – Fix the Panels (Top Section)

- Secure each panel half at the top edge using at least two 4 × 40 A2 screws per panel (see Fig.6,7,8 and 9). Aim for the most even gap between the juniper wood slices (pucks)
- Check alignment with a level. (see Fig.10)
- Adjust slightly if needed before fully tightening.



fig. 5



fig. 6



fig. 7



fig. 8



fig. 9



fig. 10



Step 4 – Fix the Panel (Bottom Section)

- Secure each panel half at the bottom edge using at least two 4 × 40 A2 screws per panel.(see Fig.11,12 and 13)
- Aim for the most even gap between the juniper wood slices (pucks)
- Ensure the panel is firmly fixed but not over tightened



fig. 11

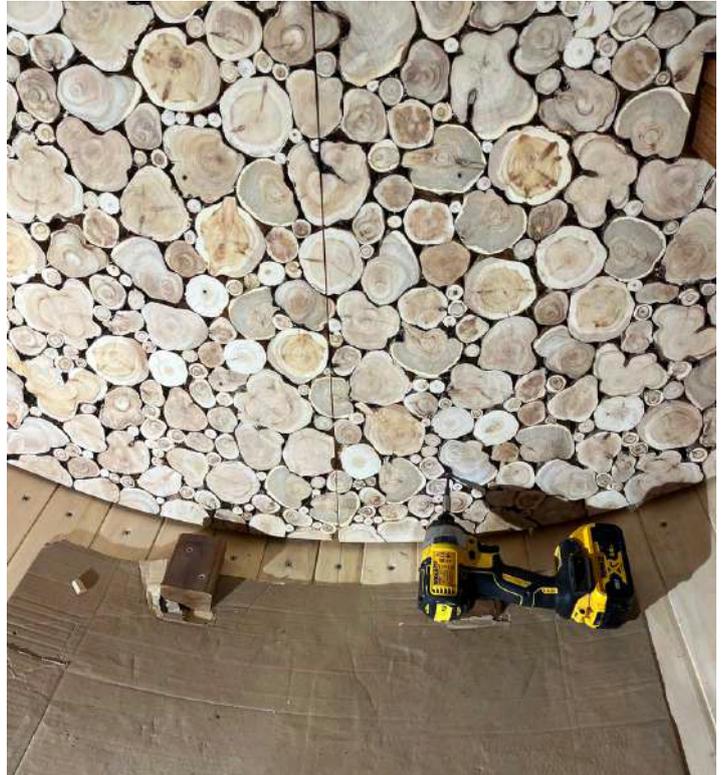


fig. 12



fig. 13

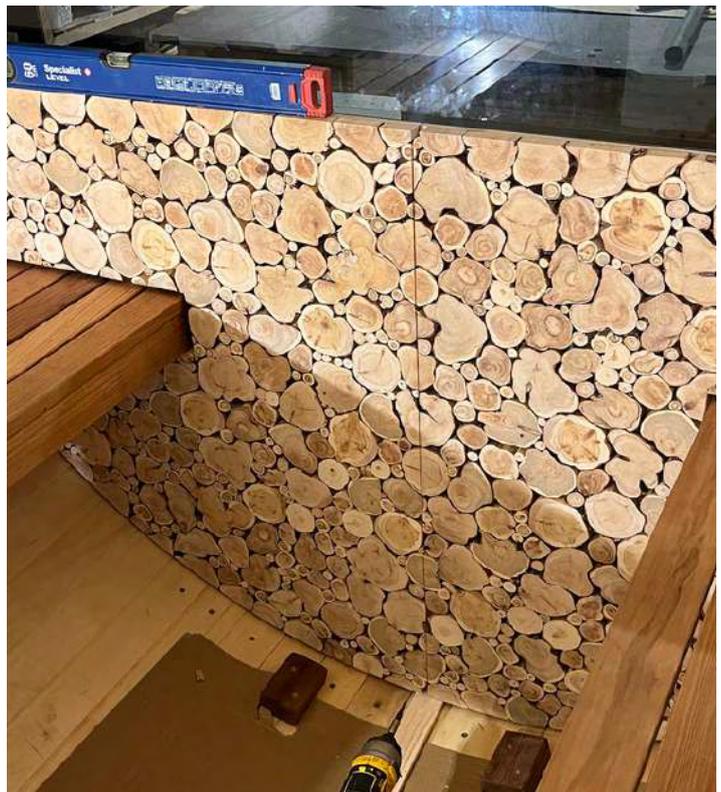


fig. 14



Step 5 – Adjust Backrests

- Trim approximately 20 mm (0.78 inch) from each side of the backrest supports. (see Fig.15)
- Reinstall the backrests so they sit flush over the Juniper panel. (see Fig. 16 and 17)



fig. 15



fig. 16



fig. 17



Step 6 – Final Assembly

- Place floor grids back in the sauna
- Check screw length before installing the heater. Juniper panel is approx. 30 mm (1.18 inch) thick.
- Screws for heater should go past the juniper panel and attach to the main wall.

